



Codice - Code:

C69017Shower set with WC-cleaning
handspray

Descrizione - Description:

Set doccia idrogetto in ABS, supporto con arresto acqua 1/2" M e flessibile Cromolux in PVC retinato nylon

*Shower set composed by ABS WC-cleaning handspray, water inlet with stop valve and bracket, 1/2" connection and Cromolux PVC hose, reinforced with nylon**WC-Reinigung Handbrauseset, Halter 1/2" aG mit Wasserstoppventil und Cromolux Brauseschlauch mit Nylonfäden-Netz verstärkt**Ensemble douche pour nettoyage WC, avec support-robinet d'arrêt 1/2" M et flexible douche Cromolux PVC renforcé nylon**Conjunto ducha para limpieza WC con soporte-llave 1/2" M y flexible ducha Cromolux PVC reforzado Nylon**Комплект с лейкой Paloma 1 дыры из АБС клапаном подачи, держатель с предохранительным клапаном 1/2" М, Шланг Cromolux из армированного нейлона Ø14 1/2" x 1/2" FF наконечник конусообр для предохранительного клапана 125 см*

Tecnologia - Technology:



Immagine Prodotto - Product Image



Disegni - Drawings


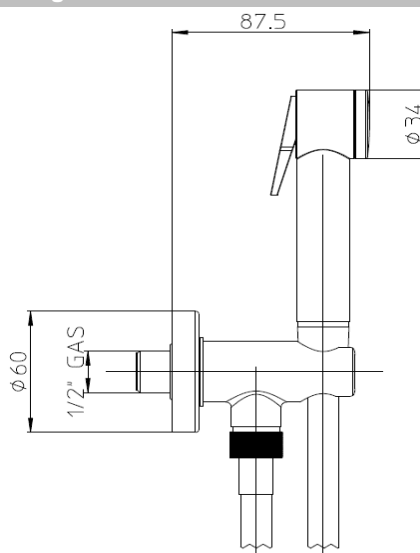


Grafico di portata - Flow rate diagram

	outlet
0	0
0,5	2,1
1	2,7
1,5	3,2
2	3,6
2,5	4,0
3	4,2
3,5	4,6
4	5,0
4,5	5,1
5	5,4
pressione bar	portata L/min

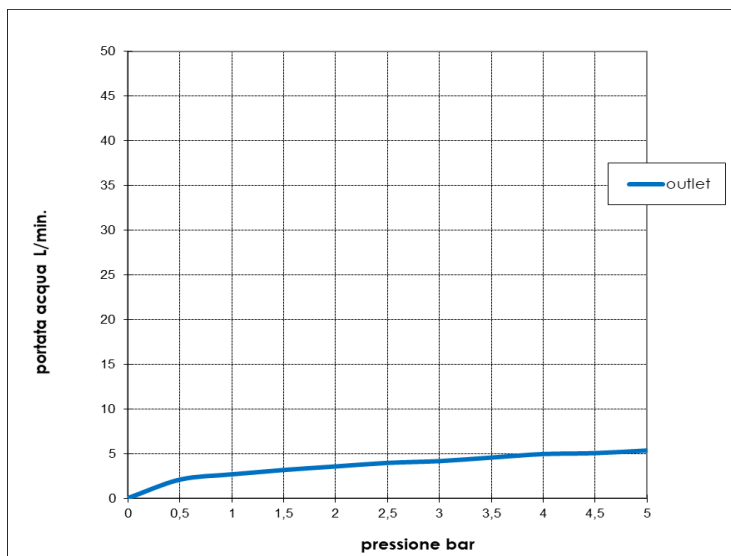

Caratteristiche idrauliche - Hydraulic features

	Pressione Pressure	Portata Flow rate	Solo per miscelatori termostatici Only for thermostatic mixers	
min	1 bar	2,5 L/min	Blocco di sicurezza Safety lock	--
max	5 bar	5,5 L/min	Temperatura acqua fredda Cold water temperature	--
Portata minima consigliata per buon funzionamento Recommended minimum flow-rate for optimal performace		2 L/min	Temperatura acqua calda Hot water temperature	--

Materiali - Materials

Presa acqua con valvola sicurezza C69000: Ottone cromato

Corpo doccia B00444: ABS cromato

Flessibile A05158: PVC retinato nylon

Shower holder with safety stop valve C69000: Chrome plated brass

Toilet jet B00444: Chrome plated ABS

Hose A05158: PVC nylon reinforced

Certificazioni - Certifications

B00444:



A05158:



Conformità' - Conformity

Chrome plating - EN 248; Hose - EN 1113